


WOOD'S POWR-GRIP® CHANNEL LIFTER



P110L02DC3S
300 lbs [135 kg]*

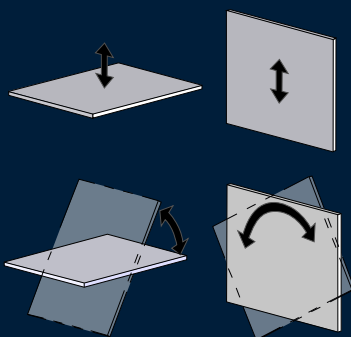

Employing state-of-the-art technology, **Intelli-Grip®** automatically monitors vacuum and power systems to:

- Maximize productivity
- Help reduce human error
- Simplify maintenance and repairs
- Protect employees and property from harm



Maximum Load Capacity	300 lbs [135 kg]*
Intelli-Grip® Technology	Automatic self-testing ensures lifter is ready for use, every lift. Color display provides critically relevant information at a glance. Anticipates threats and alerts operator beforehand with clearly visible and audible warnings. Continuously monitors battery and prevents lifter from attaching to loads if energy is hazardously low. Multiple alarm levels plainly identify the severity of hazards.
Load Movement	Manual rotation, 180° edgewise, with locking in three positions. Manual tilt, 90° between upright and flat, with automatic latching in upright position (in center rotation position, as shown on drawings).
Standard Operating Power	12 volts DC, 5 amps
Standard Features	Intelli-Grip® Technology Adjustable-position lift spool Dual vacuum system On-board battery and charger Battery energy gauge Vacuum gauges Vacuum line filters Vacuum reserve tanks High-flow vacuum pump Low vacuum strobe light Low vacuum/power loss warning buzzer with back-up battery Green lift light Blow-off for quick release Two-action, push-button release
Available Options	Remote control system (59906) Alternative vacuum pads (Specifications not as listed above. Please contact us for more information): 9" [23 cm] diameter pad (VPFS9) 10" [25 cm] diameter concave pad (G0750) 10" [25 cm] diameter pad with replaceable sealing ring (VPFS10T) Alternative pad compounds for low-marking, temperature resistant and coated surface applications (special order)



ALWAYS IN MOVEMENT

Erhvervsparken 2
9500 Hobro
Danmark
Tlf. : 0045 98576060

www.jlmteknik.dk

JLMteknik is a proud Distributor of Wood's Powr-Grip products.



As a smaller version of Powr-Grip's popular P1 Channel Lifter, this mighty little vacuum lifter is ideal for handling and installing commercial or residential windows, skylights and solar panels. An on-board, DC power system enhances lifter portability.

Dual Vacuum System	Features two completely independent vacuum circuits. Provides vacuum system redundancy. Limits possibility of a catastrophic failure. Reduces chance of harm to personnel or equipment.
Lifter Weight	80 lbs [36 kg]
Standard Pad Spread	24" x 11" [61 cm x 28 cm]
Number / Size of Pads	2 / 10" [25 cm] dia. lipped vacuum pads
Design Standards	ASME B30.20 (BTH-1 Design Category "B", Service Class "0") AS 4991-2004 CE (See www.WPG.com for more information.)
Based on product information at time of publication. Environmental conditions can affect product performance and longevity; consult the product instructions on WPG.com or contact a Technical Sales Representative for more information.	

